



# CIRRELT

Centre interuniversitaire de recherche  
sur les réseaux d'entreprise, la logistique et le transport

Interuniversity Research Centre  
on Enterprise Networks, Logistics and Transportation

---

## The Vehicle Routing Problem with Cross-Docking and Resource Constraints

Philippe Grangier  
Michel Gendreau  
Fabien Lehuédé  
Louis-Martin Rousseau

May 2017

CIRRELT-2017-23

Bureaux de Montréal :  
Université de Montréal  
Pavillon André-Aisenstadt  
C.P. 6128, succursale Centre-ville  
Montréal (Québec)  
Canada H3C 3J7  
Téléphone : 514 343-7575  
Télécopie : 514 343-7121

Bureaux de Québec :  
Université Laval  
Pavillon Palasis-Prince  
2325, de la Terrasse, bureau 2642  
Québec (Québec)  
Canada G1V 0A6  
Téléphone : 418 656-2073  
Télécopie : 418 656-2624

[www.cirrelt.ca](http://www.cirrelt.ca)

# The Vehicle Routing Problem with Cross-Docking and Resource Constraints

Philippe Grangier<sup>1,\*</sup>, Michel Gendreau<sup>1</sup>, Fabien Lehuédé<sup>2</sup>, Louis-Martin Rousseau<sup>1</sup>

<sup>1</sup> Interuniversity Research Centre on Enterprise Networks, Logistics and Transportation (CIRRELT) and Department of Mathematics and Industrial Engineering, Polytechnique Montréal, P.O. Box 6079, Station Centre-Ville, Montréal, Canada H3C 3A7

<sup>2</sup> IMT Atlantique, L2SN, UMR CNRS 6004, 4 rue Alfred Kastler, 44300 Nantes, France

**Abstract.** In this paper, we propose an extension of the vehicle routing problem with cross-docking that takes into account resource constraints at the cross-dock. These constraints limit the number of docks that can be used simultaneously. To solve this new problem, we adapt a recently proposed matheuristic based on large neighborhood search. In particular, we focus on the feasibility tests for insertions and compare heuristics and constraint programming strategies. Finally, computational experiments on instances adapted from the vehicle routing problem with cross-docking are reported. They give insights on the impact of a limited cross-dock capacity on the routing cost.

**Keywords.** Routing, matheuristic, resource constraints.

**Acknowledgements.** This work was partially supported by the Natural Sciences and Engineering Research Council of Canada (NSERC) (RGPIN-2015-04696) and by the Fonds de recherche du Québec - Nature et technologies (FRQNT) through its team research Program.

Results and views expressed in this publication are the sole responsibility of the authors and do not necessarily reflect those of CIRRELT.

Les résultats et opinions contenus dans cette publication ne reflètent pas nécessairement la position du CIRRELT et n'engagent pas sa responsabilité.

---

\* Corresponding author: Philippe.Grangier@cirrelt.ca

## 1 Introduction

In logistics, cross-docking is a distribution strategy in which goods are brought from suppliers to an intermediate transshipment point, the so-called cross-dock, where they may be transferred (without storing) to another vehicle for delivery. Compared to traditional distribution systems, cross-docking can help reducing delivery costs and delivery lead time, that is why it is used by many companies from different sectors: LTL, retail or automotive for example [40]. In the vehicle routing literature, the associated routing problem is called the Vehicle Routing Problem with Cross-Docking (VRPCD). It is a variant of the Pickup and Delivery Problem with Transfers with one compulsory transfer point: vehicles start by collecting items, then return to the cross-dock where they unload/reload some items and eventually visit delivery locations. A few authors have proposed methods to solve this problem or variants of it, but to our knowledge, in most models there is no limit on the processing capacities of the cross-dock: as soon as a truck arrives, it immediately undergoes consolidation operations. However in practice, this may not be the case because of limited equipment or workforce, thus trucks may have to wait before being unloaded. In fact, a wide range of the cross-docking literature is dedicated to the scheduling of operations at the cross-dock taking into account the cross-dock capacity. It has recently been pointed out [6, 20], that there is a need to consider the synchronization of local and network-wide cross-docking operations, in particular to take into account resource capacity at the cross-dock. To that end, in this paper, we introduce a new variant of the VRPCD in which the number of vehicles that can simultaneously be processed at the cross-dock is limited. We call it the Vehicle Routing Problem with Cross-Docking and Resource Constraints (VRPCD-RC). The dock resource constraint, is a *resource synchronization constraint* as defined by Drexler [9] as vehicles compete to access a scarce resource: the processing capacity of the cross-dock. Very often resource synchronization constraints imply a difficult scheduling problem which is embedded within the vehicle routing problem. VRPCD-RC is no exception and the main contribution of this paper is on the integration of the scheduling problem associated with the dock resource constraints within a recently proposed large neighborhood search based method [13] for the VRPCD.

The remainder of this paper is organized as follows. A literature review is presented in Section 2, while the problem is defined in Section 3. In Section 4, we recall the method of [13], and Section 5 is devoted to the its adaptation to VRPCD-RC. Eventually, computational results are presented in Section 6.

## 2 Literature review

In this section we review the literature on two related vehicle routing problems: the vehicle routing problem with cross-docking and vehicle routing problems with resource synchronization.

### 2.1 The vehicle routing problem with cross-docking

A lot of cross-docking related problems exist such as: location, assignment of trucks to doors, inner flow optimization or routing. In particular, the vehicle routing problem with cross-docking consists in designing routes to pick up and deliver a set of transportation requests at minimal cost using a single cross-dock. It was introduced by Lee et al. [21] in a variant which imposes trucks to arrive at the exact same time at the cross-dock. Wen et al. [42] relaxed this constraint only imposing precedence constraints based on the consolidation decisions and they also added time windows. This is the most studied variant, and it is the one we will refer to as the *vehicle routing with cross-docking* (VRPCD). Several heuristics have been proposed to solve it: based on tabu-search [42, 38, 27, 26], iterated local search [25] and large neighborhood search [13]. Other variants have been studied by Santos et

al. [31, 33] which integrates a cost for transferring item at the cross-dock and have no temporal constraints. It was later extended in [32] with optional cross-dock return. These three articles proposed methods based on branch-and-price. The work of Petersen and Ropke [28] considered optional cross-dock return and multiple trips per day. They proposed a parallel adaptive large neighborhood search to solve large real-life instances with up to 982 requests. In [27], Nikolopoulou et al. considered optional cross-dock returns when comparing direct shipping versus cross-docking strategy. Dondo and Cerdà [8] considered a case where the number of doors is fixed and smaller than the number of trucks. In particular each door is modeled individually: a time matrix models the time spent by a truck for moving from an inbound door  $a$  to an outbound door  $b$ . They solved two randomly generated instances with up to 70 requests with a mathematical model combined with a sweep heuristic. Recently, Maknoon and Laporte [23] studied the extension of the problem to multiple cross-docks, Nikolopoulou et al. studied the many-to-many case and Ahmadizar et al. [2] proposed a hybrid genetic algorithm for the multiple cross-dock, multiple suppliers case. From a general perspective, the VRPCD can be viewed as a special case of the pickup and delivery problem with transfers with only one compulsory transfer point [7]. Guastaroba et al. [17] released a survey on intermediate facilities in freight transportation. For a general overview of cross-docking and cross-dock related problems we refer the reader to [5, 1, 40]

## 2.2 Resource synchronization

The expression *resource synchronization* appears in [9] as a way to model the following constraint:

‘The total consumption of a specified resource by all vehicles must be less than or equal to a specified limit.’

Of course, this resource has to be scarce to be constraining, as vehicles *compete* to access it. Such resource constraints arise in many different vehicle routing problems usually when a special infrastructure or equipment is required: a docking station or parking space in airport cargo system [10], a berth in maritime transportation [16], a forest loader in forestry [11], a pump in ready mix-concrete delivery [36], an asphalt paver in public works [14]. Limited storage [10] or processing capacities [18] can also account for resource synchronization constraints. Hemsch and Irnich [18] also mention a situation where only a fixed number of vehicles (smaller than the total number) can perform *long* routes.

Many approach have been applied to deal with these resource constraints in vehicle routing problems. In [10], Ebben et al. sequentially inserted requests and check resource constraints in a predefined order. In [11], El Hachemi et al. used a dedicated constraint programming model, later combined with a greedy scheduling heuristic in [12], to ensure that resource constraints are satisfied during their entire solving process. In ready-mix concrete routing problems as well as in public works routing problem, orders are larger than truck capacity, as such they have to be split into several delivery operations that should not overlap. Resource synchronization constraints arise at pickup sites or at delivery sites or at both. Asbach et al. [3], Schmid et al. [36], Schmid et al. [35] and Grimault et al. [15] imposed precedence constraints on the sequencing of operations to handle precedence constraints. Gronhaug et al. [16] relied on a time-discretized formulation in which resource synchronization constraints are easily expressed. Hemsch and Irnich [18] proposed a generic modeling for inter-routes constraints via the use of Resource Extension Functions (REF). In particular they focused on the use of REF as efficient feasibility tests in local search based algorithms when the solution is represented by a giant tour. From this literature review, it is clear that most of the resource synchronization constraints are in fact complex scheduling problem integrated into a

vehicle routing problem. However the precise definition of the scheduling problem depends largely on the vehicle routing problem at stake.

### 3 The vehicle routing problem with cross-docking: model and resource synchronization constraint

This section presents the vehicle routing problem with cross-docking, and in particular the cross-dock model, as defined by Wen et al. [42]. It also introduces the two cross-dock resource models that we consider.

#### 3.1 The vehicle routing problem with cross-docking

In the VRPCD, we consider a cross-dock  $c$ , a set of requests  $R$ , and a homogeneous fleet of vehicles  $V$ , each of capacity  $Q$  and based at  $o$ . Each request  $r \in R$  has to be picked up at its pickup location  $p_r$  within its pickup time window  $[e_{p_r}, l_{p_r}]$ , and delivered at its delivery location  $d_r$  within its delivery time window  $[e_{d_r}, l_{d_r}]$ . In the case of early arrival, a vehicle is allowed to wait, but late arrivals are forbidden. We denote by  $P$  the set of pickup locations and by  $D$  the set of delivery locations.

Each vehicle starts at  $o$ , goes to several pickup locations, and then arrives at the cross-dock where it unloads/reloads some requests. It then visits several delivery locations and eventually returns to  $o$ . Note that a vehicle must visit the cross-dock even if it does not unload nor reload there. The sequence of operations at the cross-dock is described in 3.2. The VRPCD is defined on a directed graph  $G = (V, A)$ , with  $G = \{o\} \cup P \cup \{c\} \cup D$  and  $A = \{(o, p) | p \in P\} \cup P \times P \cup \{(p, c) | p \in P\} \cup D \times D \cup \{(d, e) | d, e \in D\} \cup \{(d, o) | d \in D\} \cup \{(o, c), (c, o)\}$ . With each arc  $(i, j) \in A$  is associated a travel time  $t_{i,j}$  and a travel cost  $c_{i,j}$ .

Solving the VRPCD involves finding  $|V|$  routes, and a schedule for each route, such that the capacity and time-related constraints are satisfied, at minimal routing cost. An arc-based mathematical formulation can be found in [42].

#### 3.2 Precedence constraints at the cross-dock

Following [42], if a vehicle  $k$  has to unload a set of items  $R_k^-$  and reload a set  $R_k^+$  at the cross-dock, the time spent at the cross-dock can be divided into four periods:

- Preparation for unloading. The duration  $\delta_u$  of this period is fixed.
- Unloading. The duration of this period depends on the quantity of items to unload. For vehicle  $k$  the duration is  $(\sum_{i \in R_k^-} q_i) / s_u$ , where  $s_u$  is the unloading speed in quantity per time unit. All unloaded items become available for reloading at the end of this period.
- Preparation for reloading. The duration  $\delta_r$  of this period is fixed.
- Reloading of requests. The duration of this period depends on the quantity of items to reload. For vehicle  $k$  the duration is  $(\sum_{i \in R_k^+} q_i) / s_r$ , where  $s_r$  is the reloading speed in quantity per time unit. All the items for loading must have been unloaded before the beginning of the reloading operation (preemption is not allowed).

Items that are not transferred at the cross-dock remain in the vehicle. Thus, if a vehicle does not unload or reload it need not spend any time at the cross-dock and can leave immediately.

### 3.3 Resource constraints models at the cross-dock

According to Van Belle et al. [40], the most common service mode of a cross-dock is called *exclusive*. In an exclusive mode, a dock door is either exclusively dedicated to unloading (inbound operations) or reloading (outbound operations). Such assignment is a decision taken at a strategical or tactical level that cannot be modified in the VRPCD, which is an operational problem. In practice most cross-docks are I-shaped [40], with inbound doors on one side and outbound doors on the other. The flow of items is thus uni-directional, which is typically easier to manage. This is a common situation but it is not mandatory.

Cross-docks usually have many doors (typically ranging from 40 to 150 according to [40]). However, as mentioned in [18] or [22], processing capacities may actually be lower than the number of doors. This comes from a limited workforce or special equipment to move the items within the cross-dock. Because of the previous two considerations regarding operations at the cross-dock, we will consider two exclusive cross-dock models that integrate resource constraints:

- a case in which the total number of doors (both inbound and outbound) that can be processed simultaneously is limited to a number  $S$ . This is a simple way to model resource constraints due to limited workforce. We refer to this case as *shared*.
- a case in which the number of inbound doors (resp. outbound doors) that can be processed simultaneously is limited to a number  $I$  (resp  $O$ ). This is a simple way to model a resource constraints due to special equipment. We refer to this case as *separated*.

Provided that at least two dock doors can be processed simultaneously, the scheduling problems at the cross-dock are NP-Hard as the scheduling problem  $P2||C_{max}$  is included in them. In the rest, we will simply use *dock* to refer to the capacity in the number of docks processed simultaneously.

We call the VRPCD with these dock resource constraints, *vehicle routing problem with cross-docking and resource constraints* (VRPCD-RC). Figure 1 illustrates the sequence of consolidation operations for a vehicle that unloads and reloads items at the cross-dock in the VRPCD-RC. When the vehicle arrives at the cross-dock, it can immediately be prepared for unloading, but it has to wait before being actually unloaded ( $W_U$ ) because of a lack of available resources (note that such waiting time does not exist in the VRPCD). Once the unloading operation is done, the vehicle can proceed and move to an outbound door. Again the preparation can be performed immediately, but the truck may wait before being actually reloaded ( $W_R$ ). This waiting time can have two origins: first, not all items are available when it is ready (such situation can also arise in the VRPCD), second, there maybe a lack of available resources (which cannot occur in the VRPCD).

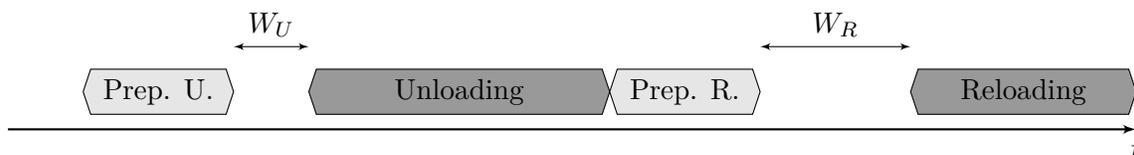


Figure 1: Time chart for vehicle unloading and reloading at the cross-dock in the VRPCD-RC

## 4 Matheuristic of Grangier et al. [13] for the VRPCD

In a previous paper [13], we proposed a matheuristic to solve the VRPCD, called LNS+SPM (Large Neighborhood Search + Set Partitioning and Matching). To our knowledge, this method is currently

one of the best heuristics for the VRPCD. A sketch of the method is given in Algorithm 1. In details, the main component is LNS (l. 4-15), which is enhanced by the occasional solution of an SPM (l.18 and l.23). When the LNS finds a new solution, the pickup and delivery part, called *legs*, of each route are added to a memory component (l. 16), called a *pool of legs*. The SPM aims to create the best possible solution from the legs in the pool. As shown in [13], this component significantly improves the quality of the solution compared to LNS alone. Hereafter, we recall the methods that are used in the LNS component and the SPM component.

**Result:** The best found solution  $s^*$

- 1 Pool of legs  $\mathcal{L} := \emptyset$
- 2 Generate an initial solution  $s$
- 3  $s^* := s$
- 4 **while** *stop-criterion not met* **do**
- 5      $s' := s$
- 6     **Destroy quantity:** select a number  $\Phi$  of requests to remove from  $s'$
- 7     **Operator selection:** select a destruction operator  $M^-$  and a repair operator  $M^+$
- 8     **Destruction :** apply  $M^-$  to remove  $\Phi$  requests from  $s'$ , and put them in the requests bank of  $s'$
- 9     **Repair:** apply  $M^+$  to reinsert the requests in the requests bank in  $s'$
- 10    **if** *acceptance criteria is met* **then**
- 11      $s := s'$
- 12    **end**
- 13    **if** *cost of  $s'$  is better than cost of  $s^*$*  **then**
- 14      $s^* := s'$
- 15    **end**
- 16    Add legs of  $s'$  to  $\mathcal{L}$
- 17    **if** *set partitioning and matching condition is met* **then**
- 18     Perform set partitioning and matching with the legs in  $\mathcal{L}$
- 19     Update  $s^*$  and  $s$  if a new best solution has been found
- 20     Perform pool management
- 21    **end**
- 22 **end**
- 23 Perform set partitioning and matching with the legs in  $\mathcal{L}$
- 24 Update  $s^*$  if a new best solution has been found
- 25 **return**  $s^*$

**Algorithm 1:** LNS+SPM of Grangier et al.

## 4.1 Large neighborhood search

Large Neighborhood Search [37] iteratively destroys (removes several requests from) and repairs (reinserts requests into) the current solution using heuristics. In what follows, the destruction and repair methods used in [13] are summarized.

### 4.1.1 Destruction operators

When partially destroying a solution, a destruction method  $M^-$  and a number  $\Phi$  of requests to remove are selected. Unless stated otherwise, this method is reused until  $\Phi$  is reached. The transfer

removal was introduced for the VRPCD, and the other removal techniques below were inspired by [29].

**Random removal:** a request is removed at random.

**Worst removal:** a request with a high removal gain is removed. This is defined as the difference in the cost of the solution with and without the request. Then, the requests are sorted in nonincreasing order of removal gain and placed in a list  $N$ . The request to remove is selected in a randomized fashion as in [30]: given a parameter  $p$ , a random number  $y$  between 0 and 1 is drawn. Then the request in position  $y^p \times |N|$  is removed.

**Historical node-pair removal:** each arc  $(u, v) \in G$  is associated with the cost of the cheapest solution it appears in (initially this cost is set to infinity). The request that is served using the arcs with the highest associated costs is removed using a randomized selection similar to that of *worst removal*.

**Related removals:** these methods aim to remove related requests. Let the relatedness of requests  $i$  and  $j$  be  $R(i, j)$ . Two distinct relatedness measures are used: distance and time. The distance measure between two requests is the sum of the distance between their pickup points and the distance between their delivery points. The time measure is the sum of the absolute difference between their start of service at their pickup points and the absolute gap between their start of service at their delivery point. In both cases a small  $R(i, j)$  indicates a high relatedness. A randomized selection, similar to *worst removal* (albeit with a non decreasing ordering), is performed.

**Transfer removal:** for each pair of routes  $(v_i, v_j)$ , with  $v_i \neq v_j$  the number of requests transferred from  $v_i$  to  $v_j$  is computed. Then a roulette-wheel selection is applied on the pairs of routes (the score of a pair being the number of requests transferred), and the requests that are transferred between the routes in the selected pair are removed. If there are less transferred requests than the target number  $\Phi$  to remove, the rest of the removals is performed with random removal.

#### 4.1.2 Repair operators

In LNS, the unplanned requests are stored in a *request bank*. In the following, the operators to reinsert them in a solution are described. Best-insertion, 2-regret, 3-regret and 4-regrets are used as repair methods in LNS+SPM.

**Best insertion:** from the requests  $r$  in the request bank, the one with the cheapest insertion cost considering all possible insertion (with and without transfer) is performed.

**Regret Insertion:** for each request  $r$  in the request bank and for each pair of vehicles (pickup vehicle, delivery vehicle), the cost of cheapest feasible insertion (if any) is computed. Note that the pickup and delivery vehicles may be the same (in the case of insertion without transfer). Then, with these insertion options, the *k-regret value* of  $r$  is defined as  $c_r^k = \sum_{i=1}^k (f_i - f_1)$ , where  $f_1$  is the cost of the cheapest insertion,  $f_2$  is the cost of the second-cheapest insertion and so on, and  $k$  is a parameter. The cheapest insertion of the request with the highest regret value is performed.

### 4.1.3 Feasibility tests and reduction of neighborhood

In [13], we used an adaptation of forward time slacks [34] due to Masson et al. [24] to check time feasibility of insertions in constant time (capacity check in constant time is straightforward). To reduce the runtime, we did not consider all insertions with transfer. For a request  $r$  we only considered transfers from the five closest vehicles to its pickup point, to the five closest vehicles from its delivery point. For large scale instances, this halved the runtime.

## 4.2 Set Partitioning and Matching

Given a set of legs  $L$ , set partitioning and matching (SPM) aims to select a subset  $\tilde{L}$  of  $L$  such that (1) each request is picked up and delivered by exactly one leg in  $\tilde{L}$  and (2) legs in  $\tilde{L}$  can be matched to form routes that respect time constraints. Each leg  $l \in L$  has an associated routing cost  $c_l$ , the objective in the SPM is to minimize the sum of the costs of the selected legs. Notice that only non-dominated legs in  $\mathcal{L}$  have to be considered in the SPM. A pickup (resp. delivery) leg  $l_i$  is said to be dominated by a leg  $l_j$  iff:  $l_i$  and  $l_j$  serve the same set of requests,  $c_j < c_i$  and  $a_j \leq a_i$  (resp.  $b_j \geq b_i$ ) where  $a$  represents the arrival time at the cross-dock and  $b$  represents the departure time from the cross-dock.

The SPM is solved using a technique called *branch-and-check*, presented in Section 4.2.1. Its subproblem is a dedicated matching and scheduling subproblem, detailed in Section 4.2.2. The SPM is solved every thousand iterations with a time limit of ninety seconds. If the SPM is solved to optimality within the time limit, the legs in memory are kept, otherwise the pool is cleared.

### 4.2.1 Branch-and-check

We present branch-and-check [39] using the following optimization problem:

$$M1 : \min c^\top x \tag{1}$$

$$Ax \leq b \tag{2}$$

$$H(x, y) \tag{3}$$

$$x \in \{0, 1\}^n \tag{4}$$

$$y \in \mathbb{R}^m \tag{5}$$

Assume that  $H(x, y)$  represents a set of constraints that have a limited impact on the LP relaxation and/or are difficult to efficiently model in a MIP, but that can be handled relatively easily by a CP solver. (1), (2) and (4) form a relaxation (M2) of (M1) that can be solved using branch-and-bound. The general principle of branch-and-check is the following. To solve (M1), a branch-and-bound is carried on (M2). Whenever an integral solution of (M2) is found, a CP solver is called to check constraints (3). If they are satisfied, the best solution found so far for (M1) is updated accordingly. Otherwise, this solution is rejected. In both cases the branch and bound process continues.

### 4.2.2 Application of branch-and-check to the VRPCD

For the SPM in the VRPCD, a classical set partitioning problem (SPP) is used as relaxation. For each request  $r \in R$  and each leg  $l \in L$ , let  $\lambda_{r,l}$  be a binary constant that indicates whether this request is served by this leg, and for each leg, let  $x_l$  be a boolean variable that indicate whether this

leg is selected. The SPP on legs is then :

$$\min \sum_{l \in L} c_l x_l \quad (6)$$

$$\sum_{l \in L_p} \lambda_{r,l} x_l = 1 \quad \forall r \in R \quad (7)$$

$$\sum_{l \in L_d} \lambda_{r,l} x_l = 1 \quad \forall r \in R \quad (8)$$

$$x_l \in \{0, 1\} \quad \forall l \in L \quad (9)$$

The objective (6) is to minimize the cost of the selected legs while constraints (7) (resp. (8)) ensure that each pickup point (resp. delivery point) is covered by exactly one leg.

A solution to the SPP on legs, which involves a set of pickup legs denoted  $\tilde{L}_p$  and a set of delivery legs denoted  $\tilde{L}_d$ , is a solution to the VRPCD iff there exists a matching of pickup legs and delivery legs to form routes that respects time constraints. For each pickup leg  $l \in \tilde{L}_p$ , let  $T_l$  be the set of delivery legs that deliver at least one request picked up by  $l$ . If a pickup leg  $l$  and a delivery leg  $l'$  are matched together to create a route, there are an associated unloading task  $o_{ll'}^-$ , with a set of requests  $R_{ll'}^-$  being unloaded, and a reloading task  $o_{ll'}^+$ , with a set of requests  $R_{ll'}^+$  being reloaded. These tasks have to be performed iff  $l$  and  $l'$  are in the same route.

The matching and scheduling problem is modeled as a constraint satisfaction problem, represented using notation from OPL (Optimization Programming Language [41]). In particular the model is based on the notion of interval variables and uses alternative constraints. As used here (from [19]):

‘An interval variable represents an interval of time during which a task happen, and whose position in time is an unknown of the scheduling problem. An interval is characterized by a start value, an end value and a size. (...) An interval variable can be optional, that is, one can decide not to consider [it] in the solution schedule.’

In this model, we model alternative activities [4] by using alternative constraints (from [19]):

‘An alternative constraint between an interval variable  $a$  and a set of interval variables  $b_1, \dots, b_n$  models an exclusive alternative between  $b_1, \dots, b_n$ . If interval  $a$  is present, then exactly one of intervals  $b_1, \dots, b_n$  is present and  $a$  starts and ends together with this specific interval. Interval  $a$  is absent if and only if all intervals in  $b_1, \dots, b_n$  are absent.’

The matching and scheduling problem is then:

$$\text{Alternative}(t_l, \{o_{ll'}^-; \forall l' \in \tilde{L}_d\}) \quad \forall l \in \tilde{L}_p \quad (10)$$

$$\text{Alternative}(t_{l'}, \{o_{ll'}^+; \forall l \in \tilde{L}_p\}) \quad \forall l' \in \tilde{L}_d \quad (11)$$

$$o_{ll'}^- . \text{IsOptional} \leftarrow \text{True} \quad \forall l \in \tilde{L}_p, \forall l' \in \tilde{L}_d \quad (12)$$

$$o_{ll'}^+ . \text{IsOptional} \leftarrow \text{True} \quad \forall l \in \tilde{L}_p, \forall l' \in \tilde{L}_d \quad (13)$$

$$o_{ll'}^- . \text{IsPresent} \iff o_{ll'}^+ . \text{IsPresent} \quad \forall l \in \tilde{L}_p, \forall l' \in \tilde{L}_d \quad (14)$$

$$t_{l'} . \text{Start} \geq t_l . \text{End} \quad \forall l \in \tilde{L}_p, l' \in T_l \quad (15)$$

$$o_{ll'}^+ . \text{Start} \geq o_{ll'}^- . \text{End} + \delta_r \quad \forall l \in \tilde{L}_p, \forall l' \in \tilde{L}_d \text{ s.t. } R_{ll'}^+ \neq \emptyset \quad (16)$$

$$o_{ll'}^+ . \text{Start} \geq o_{ll'}^- . \text{End} \quad \forall l \in \tilde{L}_p, \forall l' \in \tilde{L}_d \text{ s.t. } R_{ll'}^+ = \emptyset \quad (17)$$

$$o_{ll'}^- . \text{Start} \geq a_l + \delta_u \quad \forall l \in \tilde{L}_p, \forall l' \in \tilde{L}_d \text{ s.t. } R_{ll'}^- \neq \emptyset \quad (18)$$

$$o_{ll'}^- . \text{Start} \geq a_l \quad \forall l \in \tilde{L}_p, \forall l' \in \tilde{L}_d \text{ s.t. } R_{ll'}^- = \emptyset \quad (19)$$

$$o_{ll'}^+ . \text{End} \leq b_{l'} \quad \forall l \in \tilde{L}_p, \forall l' \in \tilde{L}_d \quad (20)$$

For each pickup leg  $l$ ,  $t_l$  is an interval variable that represents the associated unloading task that takes place at the cross dock. Alternative constraints (10) and (12) ensure that for each pickup leg  $l$  exactly one unloading task  $o_{ll}$  is scheduled and that it is equal to  $t_l$ . The same holds for delivery legs and reloading operations through variables  $t_{l'}$  and constraints (11) and (13). Constraints (14) ensure that the unloading operation associated with the matching of pickup leg  $l$  and the delivery leg  $l'$  in the same vehicle is present iff the corresponding reloading operation is present as well. Constraints (15) ensure that all the reloading operations that depend on a pickup leg  $l$  start no earlier than the end of the unloading task associated with  $l$ . Constraints (16) and (17) ensure that when two legs are packed together, the delay between the two tasks respects the model presented in Section 3.2. Constraints (18) and (19) ensure that for each pickup leg, its corresponding unloading operation cannot start before the earliest feasible arrival time at the cross-dock. Constraints (20) ensure that for each delivery leg, its corresponding reloading operation is done by its latest feasible departure time.

## 5 Proposed matheuristic for the VRPCD-RC

In this section, we present the matheuristic that has been derived from [13] for the VRPCD-RC: Large Neighborhood Search+Set Partitioning and Scheduling (LNS+SPS). In Section 5.1 we focus on the feasibility test of insertions in the repair methods. Then we summarized the methods used in the LNS in Section 5.2. Because of the dock resource constraints, in place of SPM, we propose a Set Partitioning and Scheduling problem (SPS). We present it in Section 5.3. The overall method is summarized in Section 5.4.

### 5.1 Integration of dock resource constraints in LNS

In the repair methods of LNS, we need to ensure that the insertions we consider are feasible both with respect to capacity and time-related constraints (time windows and dock resource). Capacity constraints can easily be checked in constant time, thus in what follows we focus on how to handle dock resource constraints. To that end, we start by presenting the scheduling model associated with dock resource constraints, then the methods we propose to solve it and eventually the general structure of feasibility tests we use for maximal efficiency.

#### 5.1.1 Scheduling problems associated with dock resource constraints

For each route  $k \in K$ , let  $a_k$  be its earliest feasible arrival time at the cross-dock and  $b_k$  its latest feasible departure time from the cross-dock. Given an insertion that would insert request  $r$  in route  $k_1$  for pickup and route  $k_2$  for delivery, we can compute the new earliest feasible arrival time at the cross-dock of  $k_1$ :  $a'_1$ , and the new latest feasible departure time of  $k_2$ :  $b'_2$  (provided that no time windows violation occurs in the pickup leg of  $k_1$  and in the delivery leg of  $k_2$ , in which case we could immediately reject the insertion). Thus, dock resource constraints can be seen as a satisfaction scheduling problem at the cross-dock.

For each route  $k \in K$ , let  $T_k$  be the set of routes that deliver at least one request picked up by  $k$ ; let  $t_k^-$  and  $t_k^+$  be its associated unloading and reloading operations respectively; and let  $R_k^-$  and  $R_k^+$  be the sets of requests being unloaded and reloaded respectively. Let  $isActive$  be an indicator function such that  $isActive(o, h)$  is equal to 1 iff task  $o$  is being performed at instant  $h$ . Let  $H$  be the time horizon of the problem.

In the separated case the associated scheduling problem is:

$$t_{k'}^+.Start \geq t_k^-.End \quad \forall k \in K, k' \in T_k \quad (21)$$

$$t_k^+.Start \geq t_k^-.End + \delta_r \quad \forall k \in K; s.t. R_k^+ \neq \emptyset \quad (22)$$

$$t_k^+.Start \geq t_k^-.End \quad \forall k \in K; s.t. R_k^+ = \emptyset \quad (23)$$

$$t_k^-.Start \geq a_k + \delta_u \quad \forall k \in K; s.t. R_k^- \neq \emptyset \quad (24)$$

$$t_k^-.Start \geq a_k \quad \forall k \in K; s.t. R_k^- = \emptyset \quad (25)$$

$$t_k^+.End \leq b_k \quad \forall k \in K \quad (26)$$

$$\sum_{k \in K} isActive(t_k^-, h) \leq I \quad \forall h \in [0, H] \quad (27)$$

$$\sum_{k \in K} isActive(t_k^+, h) \leq O \quad \forall h \in [0, H] \quad (28)$$

In the shared case the associated scheduling problem is:

$$(21 - 26)$$

$$\sum_{k \in K} isActive(t_k^-, h) + isActive(t_k^+, h) \leq S \quad h \in [0, H] \quad (29)$$

Constraints (21) ensure that all reloading operations that depend on a route  $k$  start no earlier than the end of the unloading task associated with  $k$ . Constraints (22) and (23) ensure the delay (preparation) between the unloading and reloading task of a route  $k$  respects the model presented in Section 3.2. Constraints (24) and (25) ensure that for each route, its corresponding unloading operation cannot start before the earliest feasible arrival time at the cross-dock. Constraints (26) ensure that for each route, its corresponding reloading operation is done by its latest feasible departure time. Constraints (27 and 28) models the separated case while constraint (29) models the shared case.

### 5.1.2 Proposed methods for the dock resource constraints

To solve the satisfaction scheduling problems of Section 5.1.1 we propose two methods: (1) using a third party CP solver or (2) using scheduling heuristics. When repeatedly calling a third party solver we cannot neglect its overhead (model building, memory allocation of the solver, ...) potentially leading to very high runtimes. Scheduling heuristics are potentially faster, we could thus perform more LNS iterations within the same time budget, but they are likely to report false negatives (stating that an insertion is infeasible although it is actually feasible). This is a runtime versus quality trade-off situation.

The scheduling heuristics we use are list heuristics: among a list of available tasks (a task is said to be available for scheduling if all its predecessors have already been scheduled) we select one task according to a given criterion and we try to schedule it. If we can schedule it, we update the resource constraints accordingly, then we update the list of available tasks to schedule. We repeat this procedure until no more tasks have to be scheduled. If at one point we cannot schedule a task, we declare this insertion infeasible according to this scheduling heuristic. The four different selection criteria we use are listed hereafter.

**First Come First Served (FCFS):** we select the task with the earliest release date in the list of available tasks.

**Earliest Due Date (EDD):** we select the task with the earliest due date in the list of available tasks.

**Most Successors First (MSF):** we select the task with the largest number of successors in the list of available tasks. By definition reloading tasks do not have successors, we break ties with the EDD rule.

**Shortest Processing Time First (SPTF):** we select the task with the shortest processing time in the list of available tasks.

### 5.1.3 Checking the feasibility of an insertion in the VRPCD-RC

First, observe that, a necessary condition for an insertion to be feasible in the VRPCD-RC, is for it to be feasible in the VRPCD. As mentioned in Section 4.1.3, feasibility tests in the VRPCD can be performed in constant time. On the other hand, feasibility test with respect to dock resource constraints in the VRPCD-RC cannot be done in constant time. Thus for maximal efficiency, we test the feasibility of an insertion as shown on Fig. 2: we start by checking if it is feasible for the VRPCD, if the insertion passes these tests, we test it with respect to dock resource constraints using either a CP solver or scheduling heuristics.

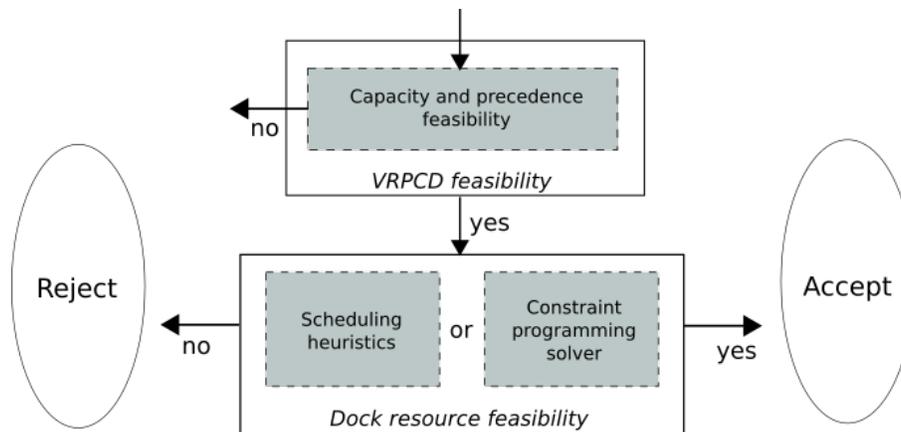


Figure 2: Logical flow-chart of feasibility tests for the VRPCD-RC

## 5.2 LNS operators

In the proposed LNS, we use the destruction operators of LNS+SPM (see Section 4.1.1). For repair operators, two facts should be taken into account: first, because of resource constraints, only a limited number of requests will be transferred (some requests that were transferred in the VRPCD may no longer be transferred in the VRPCD-RC). Thus, there is an incentive in creating routes without transfer. Second, as mentioned in Section 5.1.2, feasibility tests can no longer be performed in constant time, thus repair methods that check many insertions, such as k-regret with a high value of k, should be avoided. As such we use: best insertion, 2-regret, best insertion without transfer and 2-regret without transfer as repair methods. In the variants *without transfer*, only insertions without transfer are considered.

### 5.3 Integration of dock resource constraints in the periodical set partitioning based problem

For the VRPCD-RC, adding dock resource constraints makes the SPM (see Section 4.2) significantly more difficult. Indeed preliminary tests showed that, very often, the CP solver could not find any solution to the corresponding matching and scheduling problem within reasonable runtimes. On the other hand we noticed that the scheduling problems of Section 5.1.1 were solved by the CP solver within a relatively small time. Thus, because the set partitioning idea proved very efficient in [13], and to cope with the added complexity of the dock resource constraints, in place of SPM we propose to solve a Set Partitioning and Scheduling problem (SPS). It provides the best possible solution from a set of routes (instead of legs in the SPM). It is solved using branch-and-check. To that end a set partitioning problem on routes (similar to the SPP on legs of Section 4.2.2) is solved in a branch-and-bound fashion. At each integral node, the associated scheduling problem corresponds to the one in Section 5.1.1.

This approach is efficient to select the best routes but the matching of legs in these routes may be improved. At the end of the SPS, we solve an optimization version of the matching and scheduling problem of Section 4.2.2, where the objective is to minimize the volume transferred at the cross-dock. In the shared case, the CP problem is:

$$\min \sum_{(l,l') \in \tilde{L}_p \times \tilde{L}_d} o_{ll'} \cdot IsPresent \times \sum_{r \in R_{l,l'}} q_r \quad (30)$$

(10 - 20)

$$\sum_{l \in L_p} isActive(t_l, h) \leq I \quad \forall h \in [0, H] \quad (31)$$

$$\sum_{l' \in L_d} isActive(t'_l, h) \leq O \quad \forall h \in [0, H] \quad (32)$$

(30) minimizes the volume transferred at the cross-dock, while constraints (31) and (32) account for the capacity constraints and are similar to (27) and (28) of Section 5.1.1. A similar problem for the separated case can be formulated with an adaptation of (29).

### 5.4 Structure of the proposed method

Algorithm 2 and Algorithm 3 present a sketch of the proposed method: LNS+SPS. Algorithm 2 is similar to Algorithm 1 except for two changes. First, since feasibility tests are computationally more intensive, we consider a stop-criterion based on time, and enclose all instructions within time conditions. Second, the pool of routes  $\mathcal{K}$  (l. 2 in Algorithm 3) plays the exact same role as the pool of legs  $\mathcal{L}$  in Algorithm 1. The pool of legs  $\mathcal{L}$  is still present, it now acts as a memory that can help improving routes in  $\mathcal{K}$  before solving the SPS, as presented in Algorithm 3. We first apply dominance rules to the legs in  $\mathcal{L}$  (see Section 4.2). Then we try to improve each route in  $\mathcal{K}$  by replacing its pickup leg and/or its delivery leg by a non dominated equivalent in  $\mathcal{L}$  (l. 2-4 in Algorithm 3). We remove dominated routes from  $\mathcal{K}$  (l. 5 in Algorithm 3). A route is dominated iff there exists a route with a smaller cost that covers the same requests and can arrive earlier at the cross-dock and/or can leave later from the cross-dock. We solve the SPS, and eventually we try to improve the matching of legs in the solution. The initial solution is obtained by applying a 2-regret without transfer.

**Result:** The best found solution  $s^*$

```

1 Pool of legs  $\mathcal{L} := \emptyset$ 
2 Pool of routes  $\mathcal{K} := \emptyset$ 
3 Generate an initial solution  $s$ 
4  $s^* := s$ 
5 while stop-criterion not met do
6    $s' := s$ 
7   Destroy quantity: select a number  $\Phi$  of requests to remove from  $s'$ 
8   Operator selection: select a destruction operator  $M^-$  and a repair operator  $M^+$ 
9   Destruction : apply  $M^-$  to remove  $\Phi$  requests from  $s'$ , and put them in the requests
   bank of  $s'$ 
10  Repair: apply  $M^+$  to reinsert the requests in the requests bank in  $s'$ 
11  if acceptance criteria is met then
12    |  $s := s'$ 
13  end
14  if cost of  $s'$  is better than cost of  $s^*$  then
15    |  $s^* := s'$ 
16  end
17  Add legs of  $s'$  to  $\mathcal{L}$ 
18  Add routes of  $s'$  to  $\mathcal{R}$ 
19  if set partitioning and scheduling condition is met then
20    | Perform SPS( $\mathcal{L}$ ,  $\mathcal{K}$ ,  $s^*$ ,  $s'$ );
21  end
22 end
23 return  $s^*$ 

```

Algorithm 2: LNS+SPS

## 6 Computational experiments

The algorithm is coded in C++ and uses CPLEX and CP Optimizer from IBM ILOG Cplex Optimization Studio 12.6.1 as MIP solver and CP solver, respectively. The experiments were conducted under Linux using an Intel Xeon X7350 @ 2.93 GHz. Only one core is used both by our code and third party solvers. We consider instances proposed by Wen et al [42], that range from 50 to 200 requests. They are based on real life data from a Danish logistics company. The termination criterion for all algorithms is based on time: 15 minutes for size 50 instances, 30 minutes for size 100 for instances, 60 minutes for size 150 instances and 120 minutes for size 200 instances. SPS time limit is 180 seconds. These time limits are between two and three times the runtimes reported for the VRPCD in [13]. As in [13], the number  $\Phi$  of requests to remove in the repair phase of the LNS is drawn randomly in the interval  $[\min(30, 10\% \text{ of } |R|), \max(60, 20\% \text{ of } |R|)]$ , acceptance criterion is descent.

### 6.1 Bound setting for the number of docks

To determine when limiting the number of docks start being a constraint in the VRPCD-RC, we postprocessed the solutions obtained in [13] for the VRPCD. To that end, for all the ten solutions found for each instance for the VRPCD, we solve optimization versions of the satisfaction scheduling problems introduced in Section 5.1.1. We take as objective: to minimize  $S$  in the shared case, and in the separated case, we only consider symmetric configurations where  $I = O$  and we minimize  $I$ .

**Input:** pool of legs  $\mathcal{L}$ , pool of routes  $\mathcal{K}$ , solution  $s^*$ ,  $s'$  from Algorithm 2

- 1 Remove dominated legs from  $\mathcal{L}$
- 2 **for** each route  $k \in \mathcal{K}$  **do**
- 3     Replace, if possible, its pickup leg and/or its delivery leg with a non-dominated equivalent in  $\mathcal{L}$
- 4 **end**
- 5 Remove dominated routes from  $\mathcal{K}$
- 6 Solve SPS with all routes in  $\mathcal{K}$
- 7 **if** a new best solution has been found **then**
- 8     Improve the matching of legs (as in Section 5.3)
- 9     Update  $s^*$
- 10 **end**
- 11 **if** Set partitioning was not solved to proven optimality **then**
- 12     Clear  $\mathcal{K}$
- 13 **end**

**Algorithm 3:** Perform SPS

In table 1, columns A correspond to the smallest value obtained after two hours of runtime for the CP solver, and columns B correspond to the worst value obtained after five minutes of post-process. For each instance, columns B corresponds to a threshold for the dock value, above which, the VRPCD-RC could be solved as a VRPCD (postprocessing the solution for a limited amount of time to satisfy dock resource constraints). As such, in our experiments for the VRPCD-RC, we test dock values up to those reported in columns B.

From this table, we can observe that dock resource constraints arise for dock values that corresponds to approximately 15% of the fleet size in the shared case and 10% of the fleet size in the separated case.

Instance	Avg. fleet size	Separated		Shared	
		A	B	A	B
50a	14.2	2	2	2	2
50b	16.1	2	2	2	2
50c	16.0	2	2	2	3
50d	15.0	2	2	2	2
50e	16.0	2	2	2	3
100b	31.0	3	3	4	4
100c	31.5	3	3	4	4
100d	29.2	3	3	4	4
100e	32.0	3	3	4	5
150a	45.4	4	5	5	7
150b	46.9	4	5	6	7
150c	45.9	4	5	6	7
150d	45.0	4	5	6	7
150e	46.0	4	5	6	7
200a	62.9	6	7	8	9
200b	62.0	6	6	8	9
200c	61.1	6	7	8	9
200d	62.0	6	7	8	9
200e	62.0	6	7	8	10

Table 1: Dock value obtained when postprocessing for each instance all of ten solutions of [13]. Columns A refer to the to the best solution (min dock use) obtained after two hours, while columns B correspond to the worst value (max dock use) obtained after five minutes of post-processing.

## 6.2 Parameters tuning

In this section we evaluate and adjust several parameters. We start with the time limit for the CP solver in LNS feasibility tests, then we report the success rate of heuristics. After, we present the

influence of the SPS frequency on the quality of solutions, and eventually we compare the performance of four possible configurations: with CP solver tests/with heuristic tests in LNS, with/without SPS. For tuning, we use instances 50b, 100b, 150b, 200b, and we consider the shared cross-dock configuration case.

### 6.2.1 CP solver time limit in feasibility tests

When checking the feasibility with respect to dock resource constraints, we need to set a time limit after which the CP solver will stop searching and declare the insertion infeasible. This prevents spending a large amount of time checking the feasibility of a single insertion. In Table 2, we compare four different time limits. In the final setting, the time limit of the CP Solver is set to 0.01 seconds

CP Time Limit (s)	1	0.1	0.01	0.001
Runtime	1	0.33	0.12	0.10
Time limit hit (%)	0.5	12.9	20.1	27.3

Table 2: Comparison of four different time limits for the CP solver, when used as feasibility test in the shared case. Runtime is normalized with 1 representing the runtime for a CP solver time limit of 1s. *Time limit hit* represents the percentage of calls for which the CP solver could not find an answer within the time limit. Figures reported for one thousand LNS iterations, two runs were performed in each case.

### 6.2.2 Heuristics performance

As mentioned in Section 5.1.2, using CP versus using heuristics for feasibility tests is a quality/runtime trade-off. For each instance in the training set, we performed two runs with LNS, with the stop-criterion set to one thousand iterations. We count how many time insertions were reported feasible by heuristics and how many times they were reported feasible by the CP solver with a time limit of 1 second (according to Table 2, with this time limit we can consider that the CP solver give an accurate answer most of the time). On average, 71.1% of feasible insertions are reported feasible by heuristics. Performing one thousand LNS iterations with feasibility tests performed by heuristics takes only 18.2% of the time taken with CP solver tests (with 0.01s as time limit).

### 6.2.3 SPS frequency

In [13], the SPM was solved twenty times per run (every thousand iterations with a stop-criterion of twenty thousands iterations). In the VRPCD-RC, because feasibility tests are computationally intensive, the stop-criterion is based on time. The number of iterations performed within the time limit depends not only on the size of the instance but also on the dock value. As such, we propose a SPS-criterion based on time. In Table 3 and Table 4, we compare three different settings for the SPS frequency : 10, 20 and 40 calls within the time limit. Accordingly, the number of calls per run is set to 20 for heuristic test and 10 for CP solver test.

### 6.2.4 Performance comparison

On Fig. 3 we present the convergence curves of LNS and LNS+SPS over time for both CP solver and heuristics feasibility tests. From this graph, we can observe two things. First, as in the VRPCD, periodically solving a set partitioning based problem significantly improves performance compared to LNS alone: -6.96% for heuristic test and -7.92% for CP solver test on average. Second, the best

Number of calls	10	20	40
Average gap (%)	0	-0.70	-0.29

Table 3: Comparison of the impact of the number of SPS calls per run on the quality of the solution for heuristic feasibility tests. Five runs were performed for each dock value for each instance in the training set. *10 calls* is taken as reference for the gap

Number of calls	10	20	40
Average gap (%)	0	+0.40	+0.68

Table 4: Comparison of the impact of the number of SPS calls per run on the quality of the solution for CP solver tests. Five runs were performed for each dock value for each instance in the training set. *10 calls* is taken as reference for the gap

performing method is LNS+SPS with heuristic feasibility tests, as it finds solutions that are 1.19% better on average than LNS+SPS with CP solver test. In the rest, we thus use LNS+SPS with heuristic feasibility test.

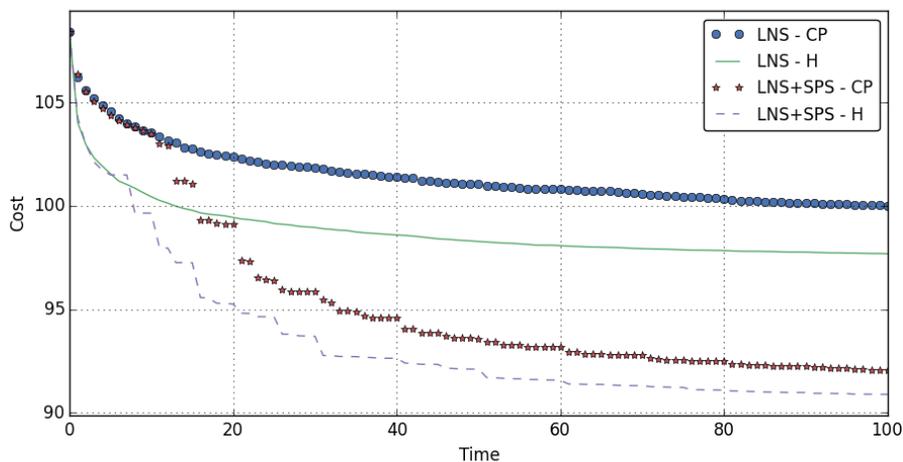


Figure 3: Comparison of the evolution of the average solution quality over time (in percentage of time limit) for four different configurations: with CP solver/with heuristics tests, with/without SPS. The results aggregate 5 runs for each dock value in the shared case for instances in the training set. They have been normalized, first by instance then by method, with 100 representing the cost at the end of LNS with CP solver tests (LNS-CP)

### 6.3 Results

Table 5 and Table 6 present the results in the shared case and in the separated case respectively. A dock value of 0 corresponds to the case where no transfer is allowed. These results highlight the increased complexity induced by integrating dock resource constraints, as there exists for each instance, at maximum dock value, a solution with 0% gap (see Section 6.1). Nevertheless LNS+SPS finds solutions that are 1.6% more expensive in the shared case and 1.5% more expensive in the

separated case, which remains satisfactory. The algorithm shows relatively good performance in terms of stability: the difference between the average value and the best value of the five runs for each instance and each dock value is 0.6% on average and at most 1.4% in the shared case and 0.6% on average and at most 3.2% in the separated case.

Regarding routing costs: integrating dock resource constraints implies an increase in cost. Comparing the two systems, the shared case costs are slightly smaller than separated costs (e.g, for instance 150b, 5.85% for 2 shared docks compared to 6.05 as shown on Fig. 4). This differences increases with the number of docks.

## 7 Conclusion


This paper presents an adaptation of the method proposed in [13], which is based on large neighborhood search and periodic calls to a set partitioning based problem, to solve an extension of the VRPCD that includes resource synchronization constraints at the cross-dock. To deal with these constraints, scheduling heuristics and a CP model have been used as feasibility tests for insertions in LNS. In this case, experiments have showed that heuristics are the most efficient compromise. Compared to [13], because of the increased complexity induced by resource synchronization constraints, the set partitioning based problem had to be adapted with a simpler subproblem. As in [13], adding this component helps finding solutions significantly better than those obtained by LNS alone. The proposed method has been tested on instances from the literature, where it shows an increase in routing costs with the decrease in cross-dock capacity.

Instance	Dock	Average		Best		Instance	Dock	Average		Best	
		Value	Gap (%)	Value	Gap (%)			Value	Gap (%)	Value	Gap (%)
50a	0	6882.4	6.5	6871.93	6.4	150e	0	21036.12	7.9	21019.3	8.1
	1	6682.72	3.4	6628.05	2.7		1	20827.96	6.8	20703.5	6.4
	2	6530.81	1.0	6471.48	0.2		2	20774.68	6.6	20587.3	5.9
50b	0	8027.87	8.1	8021.81	9.6		3	20599.16	5.7	20320.2	4.5
	1	7609.07	2.4	7541.33	3.0		4	20398.18	4.6	20341.0	4.6
	2	7481.99	0.7	7470.78	2.0		5	20346.68	4.4	20245.7	4.1
50c	0	7857.77	7.3	7827.67	7.1		6	20073.92	3.0	20025.5	3.0
	1	7505.34	2.5	7473.94	2.2	7	19915.4	2.2	19773.1	1.7	
	2	7449.88	1.8	7397.38	1.2	200a	0	28779.68	7.1	28760.6	7.2
	3	7338.88	0.3	7330.08	0.3		1	28507.12	6.1	28423.1	6.0
50d	0	7760.32	10.2	7760.11	10.4		2	28516.14	6.2	28263.0	5.4
	1	7272.57	3.3	7206.48	2.5		3	28273.0	5.2	28159.1	5.0
	2	7108.91	1.0	7076.13	0.7		4	28323.38	5.4	28146.5	5.0
50e	0	8157.77	9.1	8156.94	9.4		5	28151.24	4.8	28054.8	4.6
	1	7843.08	4.9	7772.39	4.3		6	28099.32	4.6	27959.8	4.3
	2	7616.54	1.8	7554.75	1.4		7	27922.8	3.9	27782.5	3.6
100b	3	7537.85	0.8	7473.56	0.3		8	27704.08	3.1	27527.8	2.7
	0	15636.26	8.8	15628.7	8.9	9	27497.36	2.4	27391.5	2.1	
	1	15322.86	6.6	15234.2	6.2	200b	0	29168.18	6.9	29082.8	6.9
	2	15181.04	5.6	15073.8	5.0		1	28962.52	6.1	28771.7	5.7
3	14929.18	3.8	14810.3	3.2	2		28809.76	5.5	28751.4	5.6	
4	14700.96	2.3	14620.3	1.9	3		28784.88	5.5	28514.1	4.8	
100c	0	14915.92	7.9	14915.6	8.2		4	28589.7	4.7	28546.4	4.9
	1	14654.16	6.0	14611.5	6.0		5	28374.36	4.0	28186.6	3.6
	2	14456.6	4.5	14395.0	4.4		6	28446.44	4.2	28234.3	3.7
	3	14353.9	3.8	14188.2	2.9		7	28156.7	3.2	28091.2	3.2
100d	4	14145.78	2.3	14081.3	2.2		8	27889.54	2.2	27677.2	1.7
	0	14860.46	9.3	14832.5	9.2	9	27630.92	1.2	27516.8	1.1	
	1	14424.74	6.1	14338.9	5.6	200c	0	28153.28	7.9	28119.3	8.5
	2	14316.7	5.3	14207.4	4.6		1	27996.14	7.3	27819.7	7.3
3	14070.18	3.5	13976.2	2.9	2		27744.12	6.4	27555.7	6.3	
4	13866.24	2.0	13774.7	1.5	3		27629.96	5.9	27381.3	5.6	
100e	0	15095.92	8.1	15091.5	8.2		4	27534.98	5.5	27207.7	4.9
	1	14819.26	6.2	14733.8	5.7		5	27522.48	5.5	27315.8	5.4
	2	14783.82	5.9	14622.8	4.9		6	27236.38	4.4	27135.5	4.7
	3	14515.0	4.0	14384.7	3.2		7	26921.14	3.2	26820.2	3.4
	4	14357.26	2.9	14258.4	2.3		8	26685.4	2.3	26570.1	2.5
150a	5	14281.0	2.3	14085.3	1.0	9	26583.44	1.9	26477.1	2.1	
	0	20859.22	7.5	20807.7	7.5	200d	0	29463.02	7.6	29446.8	7.8
	1	20534.8	5.8	20406.4	5.4		1	29328.88	7.1	29227.0	6.9
	2	20505.68	5.7	20342.5	5.1		2	29126.9	6.3	28993.7	6.1
	3	20248.54	4.4	20090.1	3.8		3	28962.52	5.7	28825.7	5.5
	4	20110.14	3.7	19988.6	3.3		4	28866.58	5.4	28776.3	5.3
	5	19822.08	2.2	19740.0	2.0		5	28777.12	5.0	28523.2	4.4
6	19725.04	1.7	19629.7	1.4	6		28708.02	4.8	28546.4	4.5	
7	19603.78	1.0	19541.6	0.9	7		28467.38	3.9	28283.7	3.5	
150b	0	22272.64	7.7	22236.5	8.0		8	28208.72	3.0	28129.6	2.9
	1	22018.68	6.5	21934.5	6.6	9	28002.7	2.2	27877.6	2.0	
	2	21882.36	5.9	21825.0	6.0	200e	0	28225.92	8.1	28139.3	8.0
	3	21651.48	4.7	21585.3	4.9		1	28106.28	7.7	28001.5	7.4
	4	21432.16	3.7	21360.2	3.8		2	27935.84	7.0	27659.2	6.1
	5	21227.66	2.7	21097.6	2.5		3	27789.42	6.4	27566.0	5.8
	6	21065.9	1.9	20986.2	2.0		4	27610.22	5.8	27432.2	5.3
7	20963.44	1.4	20899.9	1.5	5		27421.46	5.0	27113.3	4.0	
150c	0	21313.88	7.8	21295.7	8.0		6	27324.54	4.7	27067.2	3.9
	1	21095.74	6.7	20959.6	6.2		7	27061.8	3.7	26967.5	3.5
	2	20945.68	5.9	20854.4	5.7		8	26858.48	2.9	26772.0	2.7
	3	20869.2	5.5	20642.1	4.6		9	26665.24	2.1	26543.9	1.8
	4	20685.7	4.6	20559.7	4.2	10	26677.62	2.2	26600.4	2.1	
	5	20475.68	3.6	20369.1	3.3	150d	0	21962.58	7.9	21951.3	8.0
	6	20208.76	2.2	20155.8	2.2		1	21735.46	6.8	21536.0	6.0
7	20153.68	1.9	20100.9	1.9	2		21609.34	6.2	21442.6	5.5	
150d	0	21962.58	7.9	21951.3	8.0		3	21448.08	5.4	21368.0	5.2
	1	21735.46	6.8	21536.0	6.0		4	21504.76	5.6	21289.8	4.8
	2	21609.34	6.2	21442.6	5.5		5	21040.52	3.4	20874.7	2.7
	3	21448.08	5.4	21368.0	5.2		6	20806.38	2.2	20642.2	1.6
	4	21504.76	5.6	21289.8	4.8	7	20715.78	1.8	20608.5	1.4	
	5	21040.52	3.4	20874.7	2.7						
	6	20806.38	2.2	20642.2	1.6						
7	20715.78	1.8	20608.5	1.4							


Table 5: Average values and best solution found in the shared cross-dock configuration case; LNS+SPS was run five times for each instance. Columns *Gap* refer to the gap to average values and best solutions reported in [13] for the VRPCD

Instance	Dock	Average		Best		Instance	Dock	Average		Best	
		Value	Gap (%)	Value	Gap (%)			Value	Gap (%)	Value	Gap (%)
50a	0	6882.4	6.5	6871.93	6.4	150e	0	21036.12	7.9	21019.3	8.1
	1	6614.32	2.3	6554.55	1.5		1	20888.67	7.2	20774.5	6.8
	2	6574.13	1.7	6545.34	1.4		2	20722.35	6.3	20625.8	6.0
50b	0	8027.87	8.1	8021.81	9.6		3	20551.0	5.4	20280.7	4.3
	1	7520.61	1.3	7496.96	2.4		4	20347.46	4.4	20179.9	3.8
	2	7462.01	0.5	7451.21	1.8	5	19884.9	2.0	19789.0	1.7	
50c	0	7857.77	7.3	7827.67	7.1	200a	0	28779.68	7.1	28760.6	7.2
	1	7428.2	1.5	7385.09	1.0		1	28530.67	6.2	28419.3	6.0
	2	7359.79	0.5	7335.97	0.3		2	28435.3	5.9	28267.4	5.4
50d	0	7760.32	10.2	7760.11	10.4		3	28173.58	4.9	28063.0	4.6
	1	7169.38	1.8	7127.77	1.4		4	27994.62	4.2	27881.1	4.0
	2	7078.23	0.5	7054.87	0.4		5	27702.8	3.1	27555.8	2.8
50e	0	8157.77	9.1	8156.94	9.4		6	27458.1	2.2	27333.0	1.9
	1	7705.03	3.0	7649.99	2.6	7	27259.12	1.5	27177.7	1.3	
	2	7546.88	0.9	7478.02	0.3	200b	0	29168.18	6.9	29082.8	6.9
100b	0	15636.26	8.8	15628.7	8.9		1	28890.62	5.8	28695.7	5.4
	1	15184.1	5.6	15088.4	5.1		2	28784.8	5.5	28526.9	4.8
	2	15163.32	5.5	14887.9	3.8		3	28450.8	4.2	28329.2	4.1
100c	3	14718.0	2.4	14618.6	1.9		4	28200.94	3.3	28054.6	3.1
	0	14915.92	7.9	14915.6	8.2		5	28049.1	2.8	27940.8	2.7
	1	14484.24	4.7	14360.5	4.2	6	27653.76	1.3	27581.9	1.3	
100d	2	14470.17	4.6	14313.7	3.8	200c	0	28153.28	7.9	28119.3	8.5
	3	14130.18	2.2	14029.0	1.8		1	27735.95	6.3	27703.7	6.9
	0	14860.46	9.3	14832.5	9.2		2	27656.33	6.0	27451.2	5.9
100e	1	14413.18	6.0	14331.3	5.6		3	27435.67	5.2	27320.1	5.4
	2	14120.35	3.8	14036.7	3.4		4	27277.44	4.6	27083.6	4.5
	3	13911.1	2.3	13762.2	1.4		5	26846.82	2.9	26776.0	3.3
150a	0	15095.92	8.1	15091.5	8.2		6	26521.98	1.7	26387.4	1.8
	1	14801.8	6.0	14736.4	5.7	7	26362.82	1.1	26263.4	1.3	
	2	14643.54	4.9	14459.3	3.7	200d	0	29463.02	7.6	29446.8	7.8
150b	3	14329.12	2.7	14251.0	2.2		1	29172.35	6.5	29013.9	6.2
	0	20859.22	7.5	20807.7	7.5		2	28888.03	5.5	28775.9	5.3
	1	20482.68	5.6	20397.9	5.4		3	28907.9	5.5	28754.6	5.2
150c	2	20430.4	5.3	20298.3	4.9		4	28778.5	5.1	28633.4	4.8
	3	20161.44	3.9	19866.7	2.6		5	28403.72	3.7	28294.1	3.5
	4	19818.47	2.1	19683.2	1.7		6	27974.1	2.1	27846.6	1.9
150d	5	19709.34	1.6	19599.3	1.2	7	27762.08	1.3	27654.5	1.2	
	0	22272.64	7.7	22236.5	8.0	200e	0	28225.92	8.1	28139.3	8.0
	1	21922.38	6.0	21770.5	5.8		1	28046.3	7.4	27972.5	7.3
2	21896.35	5.9	21733.3	5.6	2		27683.53	6.0	27555.4	5.7	
3	21600.98	4.5	21422.4	4.1	3		27360.9	4.8	27186.0	4.3	
4	21060.7	1.9	20957.2	1.8	4		27229.36	4.3	27025.6	3.7	
5	20940.14	1.3	20877.8	1.4	5		26943.35	3.2	26823.2	2.9	
150c	0	21313.88	7.8	21295.7	8.0		6	26593.2	1.9	26530.5	1.8
	1	21060.12	6.5	20986.5	6.4	7	26687.88	2.2	26593.6	2.0	
	2	21057.4	6.5	20653.7	4.7						
	3	20707.24	4.7	20594.7	4.4						
	4	20431.26	3.3	20299.3	2.9						
150d	5	20071.94	1.5	19936.7	1.1						
	0	21962.58	7.9	21951.3	8.0						
	1	21714.83	6.7	21549.1	6.1						
	2	22019.32	8.2	21327.4	5.0						
	3	21424.15	5.2	20967.3	3.2						
	4	20964.9	3.0	20784.2	2.3						
	5	20666.2	1.5	20553.8	1.2						

Table 6: Average values and best solution found in the separated cross-dock configuration case; LNS+SPS was run five times for each instance. Columns *Gap* refer to the gap to average values and best solutions reported in [13] for the VRPCD

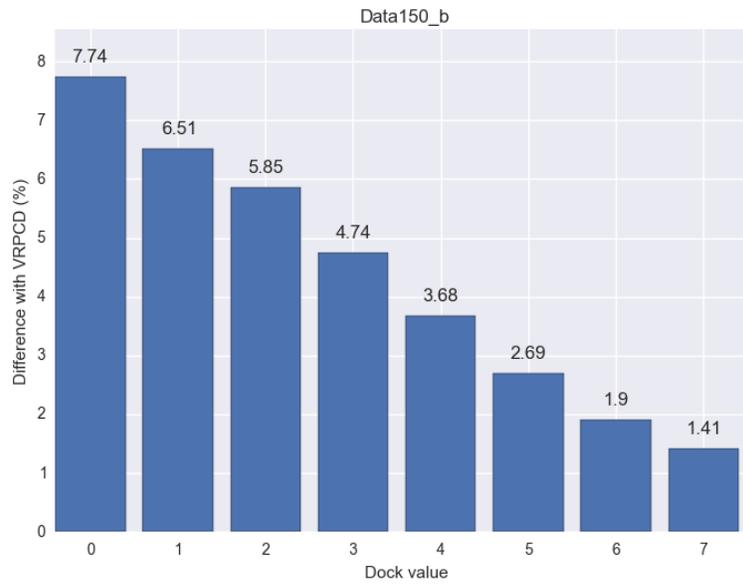

(a) *Shared* cross-dock configuration

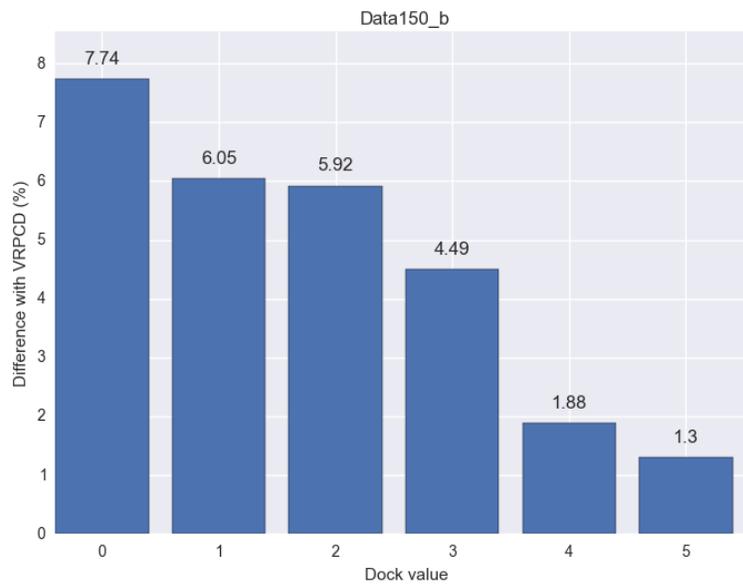

(b) *Separated* cross-dock configuration

Figure 4: Influence of the dock value for instance 150b. Five runs were performed for each dock value. The y-axis represents the average gap with respect to the average value reported in [13]

## References

- [1] Dwi Agustina, C. K. M. Lee, and Rajesh Piplani. A review: Mathematical models for cross docking planning. *International Journal of Engineering Business Management*, 2(2):47–54, 2010.
- [2] Fardin Ahmadizar, Mehdi Zeynivand, and Jamal Arkat. Two-level vehicle routing with cross-docking in a three-echelon supply chain: A genetic algorithm approach. *Applied Mathematical Modelling*, 39(22):7065–7081, 2015.
- [3] Lasse Asbach, Ulrich Dorndorf, and Erwin Pesch. Analysis, modeling and solution of the concrete delivery problem. *European Journal of Operational Research*, 193(3):820–835, 2009.
- [4] J. Christopher Beck and Mark S. Fox. Scheduling alternative activities. *Proceedings of the Sixteenth National Conference on Artificial Intelligence and Eleventh Conference on Innovative Applications of Artificial Intelligence*, pages 680–687, 1999.
- [5] Nils Boysen and Malte Flidner. Cross dock scheduling: Classification, literature review and research agenda. *Omega*, 38(6):413–422, 2010.
- [6] Paul Buijs, Iris F.A. Vis, and Héctor J. Carlo. Synchronization in cross-docking networks: A research classification and framework. *European Journal of Operational Research*, 239(3):593–608, 2014.
- [7] Cristián E. Cortés, Martín Matamala, and Claudio Contardo. The pickup and delivery problem with transfers: Formulation and a branch-and-cut solution method. *European Journal of Operational Research*, 200(3):711–724, 2010.
- [8] Rodolfo Dondo and Jaime Cerdá. A monolithic approach to vehicle routing and operations scheduling of a cross-dock system with multiple dock doors. *Computers & Chemical Engineering*, 63:184–205, 2014.
- [9] Michael Drexl. Synchronization in vehicle routing—A survey of VRPs with multiple synchronization constraints. *Transportation Science*, 46(3):297–316, 2012.
- [10] M.J.R. Ebben, M.C. van der Heijden, and A. van Harten. Dynamic transport scheduling under multiple resource constraints. *European Journal of Operational Research*, 167(2):320–335, 2005.
- [11] Nizar El Hachemi, Michel Gendreau, and Louis-Martin Rousseau. A hybrid constraint programming approach to the log-truck scheduling problem. *Annals of Operations Research*, 184(1):163–178, feb 2010.
- [12] Nizar El Hachemi, Michel Gendreau, and Louis-Martin Rousseau. A heuristic to solve the synchronized log-truck scheduling problem. *Computers and Operations Research*, 40(3):666–673, 2013.
- [13] Philippe Grangier, Michel Gendreau, Fabien Lehuédé, and Louis-Martin Rousseau. A matheuristic based on large neighborhood search for the vehicle routing problem with cross-docking. *Computers & Operations Research*, 84:116–126, 2017.
- [14] Axel Grimault, Nathalie Bostel, and Fabien Lehuédé. An adaptive large neighborhood search for the full truckload pickup and delivery problem with resource synchronization. Technical report, Ecole des Mines de Nantes 15/4/AUTO, 2015.

- [15] Axel Grimault, Fabien Lehuédé, and Nathalie Bostel. A two-phase heuristic for full truckload routing and scheduling with split delivery and resource synchronization in public works. *2014 International Conference on Logistics Operations Management*, pages 57–61, 2014.
- [16] Roar Gronhaug, Marielle Christiansen, Guy Desaulniers, and Jacques Desrosiers. A Branch-and-Price Method for a Liquefied Natural Gas Inventory Routing Problem. *Transportation Science*, 44(3):400–415, 2010.
- [17] Gianfranco Guastaroba, Maria Grazia Speranza, and Daniele Vigo. Intermediate facilities in freight transportation planning : a survey. *Transportation Science*, 50(3):763–789, 2016.
- [18] Christoph Hemsch and Stefan Irnich. Vehicle routing problems with inter-tour resource constraints. In Bruce Golden, S. Raghavan, and Edward Wasil, editors, *The Vehicle Routing Problem : Latest Advances and New Challenges*, volume 43 of *Operations Research/Computer Science Interfaces*, pages 421–444. Springer US, Boston, MA, 2008.
- [19] IBM Corporation. IBM ILOG CPLEX Optimization Studio V12.6.1 documentation, 2014.
- [20] Anne-Laure Ladier and Gülgün Alpan. Cross-docking operations: Current research versus industry practice. *Omega*, 62:145–162, 2016.
- [21] Young Hae Lee, Jung Woo Jung, and Kyong Min Lee. Vehicle routing scheduling for cross-docking in the supply chain. *Computers & Industrial Engineering*, 51(2):247–256, 2006.
- [22] Y Li, A Lim, and B Rodrigues. Crossdocking - JIT scheduling with time windows. *Journal of the Operational Research Society*, 55:1342–1351, 2004.
- [23] Yousef Maknoon and Gilbert Laporte. Vehicle routing with cross-dock selection. *Computers & Operations Research*, 77:254–266, 2017.
- [24] Renaud Masson, Fabien Lehuédé, and Olivier Péton. Efficient feasibility testing for request insertion in the pickup and delivery problem with transfers. *Operations Research Letters*, 41(3):211–215, 2013.
- [25] Vinicius W.C. Morais, Geraldo Robson Mateus, and Thiago F. Noronha. Iterated local search heuristics for the vehicle routing problem with cross-docking. *Expert Systems with Applications*, 41(16):7495–7506, 2014.
- [26] Amalia I. Nikolopoulou, Panagiotis P. Repoussis, Christos D. Tarantilis, and Emmanouil E. Zachariadis. Adaptive memory programming for the many-to-many vehicle routing problem with cross-docking. *Operational Research*, 2016.
- [27] Amalia I. Nikolopoulou, Panagiotis P. Repoussis, Christos D. Tarantilis, and Emmanouil E. Zachariadis. Moving products between location pairs: Cross-Docking versus Direct-Shipping. *European Journal of Operational Research*, 256:803–819, 2017.
- [28] Hanne L Petersen and Stefan Ropke. The pickup and delivery problem with cross-docking opportunity. In *Computational Logistics*, pages 101–113. Springer, 2011.
- [29] David Pisinger and Stefan Ropke. A general heuristic for vehicle routing problems. *Computers & Operations Research*, 34(8):2403–2435, 2007.
- [30] Stefan Ropke and David Pisinger. An adaptive large neighborhood search heuristic for the pickup and delivery problem with time windows. *Transportation Science*, 40(4):455–472, 2006.

- [31] Fernando Afonso Santos, Geraldo Robson Mateus, and Alexandre Salles da Cunha. A novel column generation algorithm for the vehicle routing problem with cross-docking. In *Network Optimization - INOC 2011*, volume 6701 of *LNCS*, pages 412–425, 2011.
- [32] Fernando Afonso Santos, Geraldo Robson Mateus, and Alexandre Salles da Cunha. The pickup and delivery problem with cross-docking. *Computers & Operations Research*, 40(4):1085–1093, 2013.
- [33] Fernando Afonso Santos, Geraldo Robson Mateus, and Alexandre Salles da Cunha. A branch-and-price algorithm for a vehicle routing problem with cross-docking. *Electronic Notes in Discrete Mathematics*, 37:249–254, 2011.
- [34] Martin W. P. Savelsbergh. Local search in routing problems with time windows. *Annals of Operations Research*, 4(1):285–305, 1985.
- [35] Verena Schmid, Karl F. Doerner, Richard F. Hartl, and Juan-José Salazar-González. Hybridization of very large neighborhood search for ready-mixed concrete delivery problems. *Computers and Operations Research*, 37(3):559–574, 2010.
- [36] Verena Schmid, Karl F. Doerner, Richard F. Hartl, Martin W. P. Savelsbergh, and Wolfgang Stoecher. A Hybrid Solution Approach for Ready-Mixed Concrete Delivery. *Transportation Science*, 43(1):70–85, 2009.
- [37] Paul Shaw. Using constraint programming and local search methods to solve vehicle routing problems. In *Principles and Practice of Constraint Programming — CP98*, volume 1520 of *LNCS*, pages 417–431, 1998.
- [38] Christos D. Tarantilis. Adaptive multi-restart tabu search algorithm for the vehicle routing problem with cross-docking. *Optimization Letters*, 7(7):1583–1596, 2012.
- [39] Erlendur S. Thorsteinsson. Branch-and-check: A hybrid framework integrating mixed integer programming and constraint logic programming. In Toby Walsh, editor, *Principles and Practice of Constraint Programming — CP 2001*, volume 2239 of *LNCS*, pages 16–30, 2001.
- [40] Jan Van Belle, Paul Valckenaers, and Dirk Cattrysse. Cross-docking: state of the art. *Omega*, 40(6):827–846, 2012.
- [41] Pascal Van Hentenryck. *The OPL Optimization Programming Language*. MIT Press, 1999.
- [42] Min. Wen, J. Larsen, J. Clausen, Jean-François Cordeau, and Gilbert Laporte. Vehicle routing with cross-docking. *Journal of the Operational Research Society*, 60(12):1708–1718, 2008.